



4" Compression Tweeter




FREQUENCY RESPONSE CURVE (Free air measurement condition)

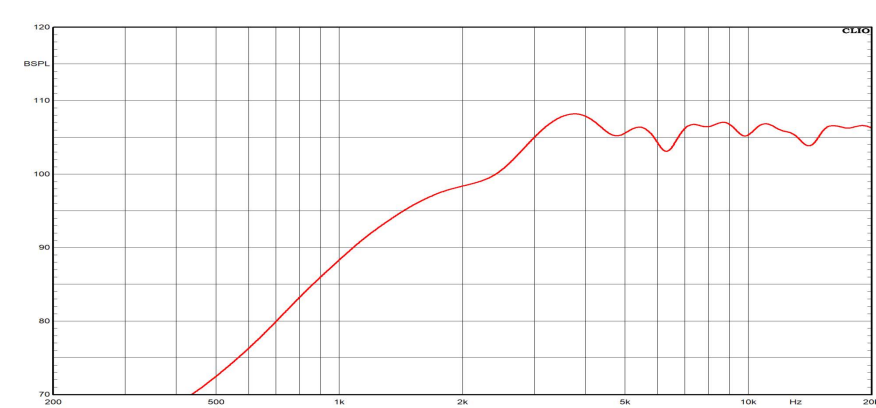


HORIZONTAL DIRECTIVITY

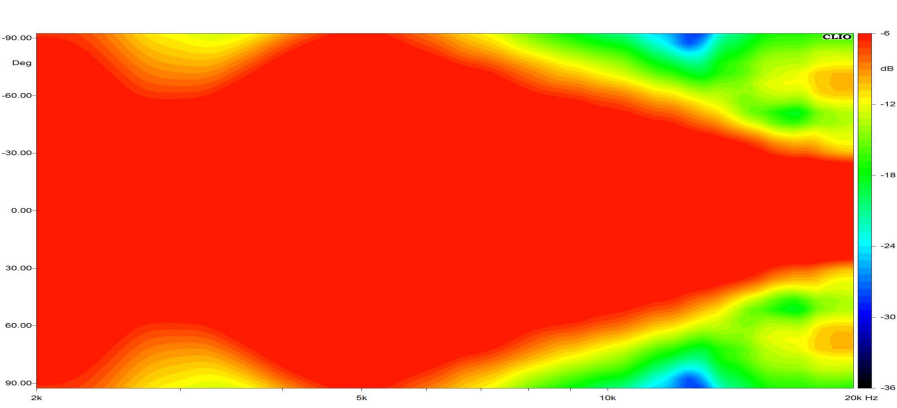

FREE AIR IMPEDANCE CURVE

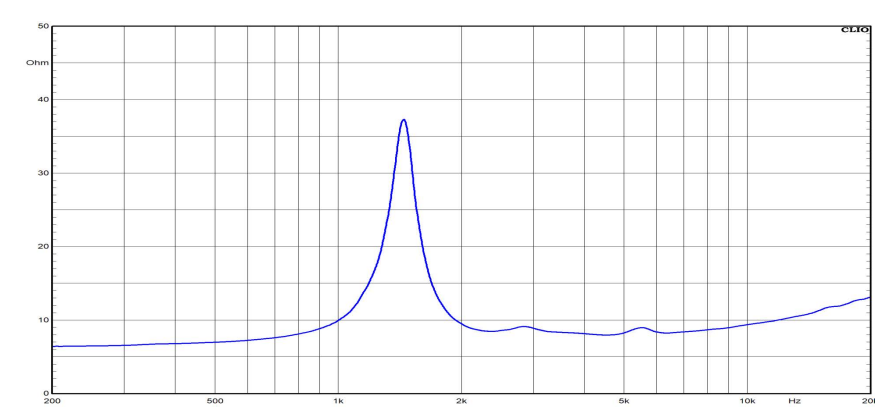

VERTICAL DIRECTIVITY

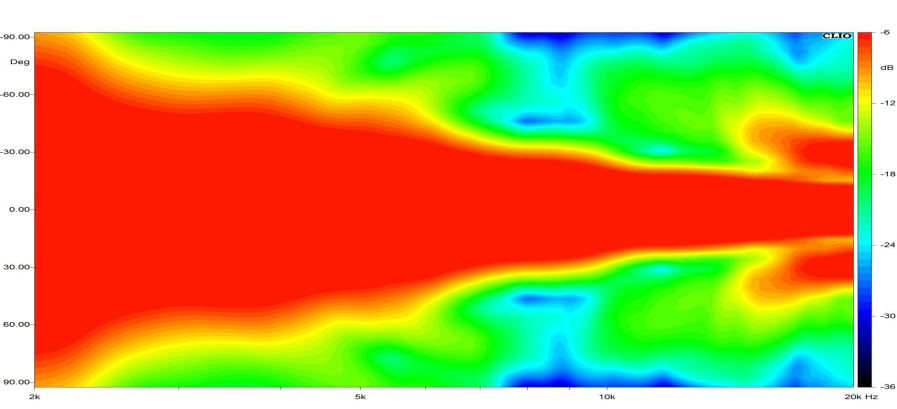

SPECIFICATIONS

Voice Coil Diameter	1,75 in - 44 mm
Rated Impedance	8 Ohm
Nominal Power Handling ¹	60 W
Program Power ²	120 W
Sensitivity ³	106 dB
Frequency Range ⁴	2400-20000 Hz
Flux Density	1,65 Tm
Magnet Material	Neodymium
Diaphragm Material	Mylar
Diaphragm Shape	Anular

MOUNTING AND SHIPPING INFORMATION

Overall Diameter	99 X 99 mm
Baffle Cutout Diameter	85 X 85 mm
Flange Thickness	4 mm - 0,16 in
Total Depth	42 mm
Bolt Circle Diameter	96 mm
Bolt Holes Quantity and Diameter	4 / 4,5 mm
Net Weight	-